



External speaker

Introduction

The Securro External speaker is a high quality speaker system that can be connected to the existing communicator unit up to 30 meters from the main communicator.


On this unit the following buttons/connectors are located: Press to Talk, Speaker On/Off, Volume, To Comms unit and Headset.

The reel with 30 meters cable has a 4 pole female connector (connection to external speaker comms) and a 7 pole male connector (connection to main comms).



Specifications

- Partnumber SE-op14-SES
- Housing external speaker Polycarbonate
- IP Class IP65
- Speaker power 20 W
- Connector (to comms unit) 4 pole male
- Connector (to headset) 4 pole female
- Operating temperature -10 to +50 °C
- Dimensions (incl. knobs & handle) l x w x h 250 x 150 x 210 mm
- Reel with 30 meter cable Plastic
- Connector (to external speaker comms) 4 pole female
- Connector (to main comms) 7 pole male
- Dimensions l x w x h 280 x 190 x 375 mm

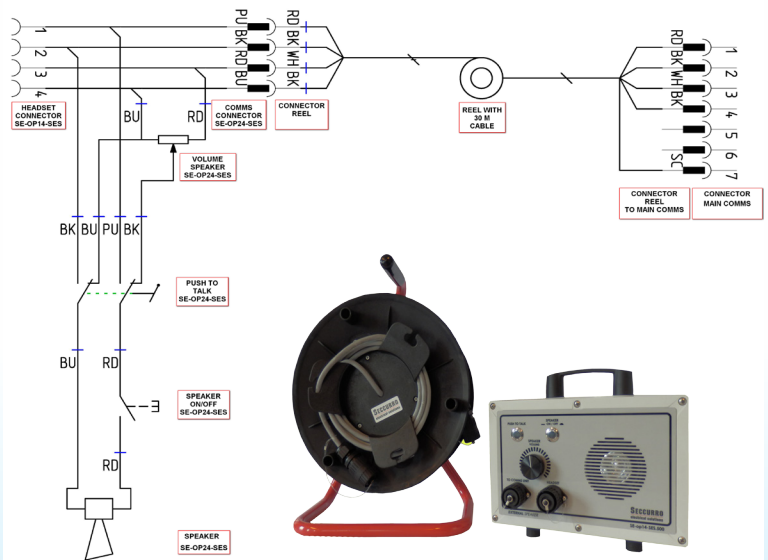

For more information, please contact Mr. R. de Jong (managing director Securro)

rwdjong@securro.com

www.securro.com

0031 (0)6 109 11 333